


Compression Locks

lever latch - adjustable grip - zinc



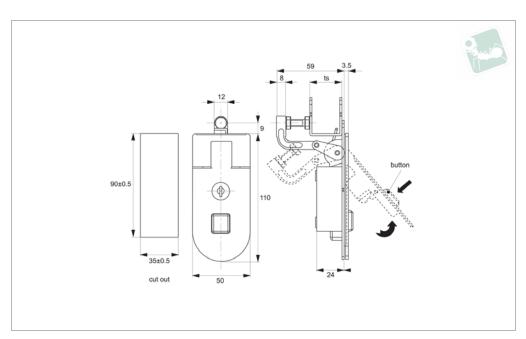

CC1220

Material

Body and handle: die cast zinc, black power coated. Cylinder lock: die cast zinc. Screw: steel, white zinc plated.

Supplied with: KEY.

Technical Notes Grip adjustment 31-48mm.

Tips

Quick-open, easy assembling. Grip length can be adjusted via clamping screw to suit your application.

Order No. CC1220.M0310

Finish Black Coated

Lock type Std. Cylinder ts grip adj. 31-48



Selecting the Correct Cam Latch or Lock



When selecting a Wixroyd Cam Latch for your application, you need to answer these questions:


- 1. Which installation cut out?
- 3. Which locking key?
- 5. Which cam type and size?

- 2. Which body style?
- 4. Which accessories?

Step 1: Which installation cut out?

Cut out

All our Flexi-System cam latches use a standard installation cut out 22,2 dia, 20,2 square, for maximum flexibility. We also provide a number of alternative cut out dimensions for legacy/historical installations.



flexi-system cut out

Typically single point latching is required, but the

Number of latching points in application

Step 2: Which body style?

Material and finish

Select from our variety of die cast zinc, polyamide plastic and stainless versions.








Polyamide



Stainless



latching (typically 3 point - at lock point, top and bottom of cabinet).





Two point



Die-cast zinc chrome plate

zinc black coated

Die-cast

Actuation and locking method

Standard insert driver type, cylinder lock or wing handle type.





Cylinder lock



Wing handle

Single point

Multi-point

Step 3: Which locking key?

Standard insert driver keys

Our range of insert driver cam latches require a simple key to actuate. Refer to part A0102 and A0103 for correct keys.





Cylinder locking

Our cam locks with cylinder locks are supplied with two keys per lock. Available as keyed alike or keyed to differ locks.



Step 4: Which accessories?

- Multi-point latching: use our rod set A0303 to A0325 for suitable rods and rod guides.
- Finger pulls: easily installed with any of our flexi-system cam bodies, finger pull no. A0352 is a simple, cost effective handle for your cabinets.
- Dust Cap: to reduce material ingress.









Vixroyd Cam and Compression Latches

product selection charts

Mescala Reout Cut out	Actuat Meth		E	Body	/	Fi	nish	es	Car			
us Cut o	~		(mm)	U	lastic	ē	pa	-		ion	ou	
cellaneo	Oriver r Loc	lanual/Grip	y length (mm	ie-Cast Zinc	Polyamide Plastic	Stainless Steel	Chrome Plated	Black Coatec		ojecti	'O Projection	ng
Miss	nsert Drive Sylinder Loc	anna	ody le	ie-Ca	olyam	tainle	hrom	lack (Natura	Vith Project	/0 P	IP Rating
A1192 - Mini Can		\geq	∣ <u>m</u> ng H	∣					Z	>	>	-
		1	10	✓ S. S.		امد:	✓		NI / A			
Cams: Supplied - Keys: N/A A1506 - Panel Latches - Fixed Grip												
	1		25			1			1			54
Cams: Supplied - Keys: A0102 A1520 - Cam Lock - Fixed Grip												
ALUZU - Gaill EUC	. IIAC	a GI	.p									
T	1		18		1				✓			
Cams: Supplied - Keys: A0102 A1546 - Panel Latch - Uncovered												
TI												
6		1		/		. ,	/		NI / A			
A1561 - Panel La	tch - wi		Cam: over	s: 5t	ıqqı	ieu	- ne	ys: ı	N/A			
	/		22,5		1				1			
			 Cam:	 s: Si	laaı	ied	 - Ke	vs: l	N/A			
A1701 - Compres	sion La											
	1			1				1				
A1707 - Compres	sion La		Cam:			_				r		
	1		19	1				1				
0			ms:			1 - K	l leys:	Su	pplie	l ed		
A1751 - Compres	sion La	tch -	Leve	er La	atch							
	/		0-	✓	//	K		1	1: _ 1			
			Cam:	5. IV.	/ H -	ney	s. S	upp	nea			

ait	Actuation Method			Body			Fi	nish	es	Cam Type			
Miscella Redus Cut out	I Insert Driver	up Cylinder Lock	o Manual/Grip	Sody length (mm)	O Die-Cast Zinc	T Polyamide Plastic	on Stainless Steel	Chrome Plated	a Black Coated	Natural	With Projection	W/O Projection	IP Rating
ž													
== (•	1					1				1		✓	40
, t		Can	ns: A	020	3. A	0224	4. A()240) - K	evs:	A01	02	
A4260 - Cam Lock	- wi									-			
		✓	.04			✓	· 8 · ·			√		✓	54
		Carr	ns: A	020	3. A	0224	4. A()240) - K	evs:	A01	02	ı
A4221 - Cam Latch	1 - W									-,			
ā													
	1		0	Various	000	✓ 2. M	222	4 12		✓ 401	00	✓	
4	Cams: A0203, A0224 - Keys: A0102												



Cam Latches and Locks

Wixroyd Cam and Compression Latches

product selection charts

*	Actuation Method		Body	Finishes	Cam Type								
ous cut out		(mm)	ic Plastic eel	ted d									
Miscellaneous Cit out	Insert Driver Cylinder Lock Manual/Grip	Body length (mm)	Die-Cast Zinc Polyamide Plastic Stainless Steel	Chrome Plated Black Coated Natural	With Projection W/O Projection	P Rating							
A1192 - Mini Can	<u>د</u> کے <u>د</u> n Latch - W				× ×	<u>L</u>							
	/	10	✓ Consulting	✓									
Cams: Supplied - Keys: N/A A1506 - Panel Latches - Fixed Grip													
The state of the s	✓	25	1	1		54							
11500			Supplied -	Keys: A0102	2								
A1520 - Cam Loc	k - Fixed G	rip 											
	1	18	1	/									
			Supplied -	 Keys: A0102	2								
A1546 - Panel Latch - Uncovered													
	✓	Cam	✓ s: Supplied	✓ - Kevs: N/∆									
A1561 - Panel La	tch - with (. Capplica										
6	✓	22,5	1	1									
			s: Supplied										
A1701 - Compres	sion Latch	- Lev	er Latch - Fl 	ush Trigger									
	1	0	V	✓									
A1707 - Compres	sion Latch		s: N/A - Key <mark>er Latch - R</mark>		r								
1	✓	19	1	1									
A1751 - Compres				 (eys: Supplie	ed								
(Se)													
	1		1	1									
	Cams: N/A - Keys: Supplied												

ait	Actuation Method			thod				Fi	nish	es	Cam Type		
Miscellaneous Cut out A4241 - Cam Latch		ur Cylinder Lock	o Manual/Grip	Sody length (mm)	O Die-Cast Zinc	T Polyamide Plastic	Stainless Steel	Chrome Plated	e Black Coated	Natural	With Projection	W/O Projection	IP Rating
j.													
	1					1				1		/	40
- K	(Carr	ns: A	020	3, A	0224	4, AC)240) - K	eys:	A01	102	
A4260 - Cam Lock	- wi	th R	od (Cont	rol -	Win	g H	andl	e - E	xte	nde	d Co	over
o		/				/				✓		1	54
1	(Carr	ns: A	020	3, A	0224	4, AC	240) - K	eys:	A01	102	
A4221 - Cam Latch	1 - W	ith I	Rod	Con	trol	- wit	th C	over					
	1		Com	Various	020	√	22	1 1/2	ioug.	✓	102	1	
W.			carr	ıs: A	020	5, Al	1224	+ - N	eys:	AUI	102		