


Expansion Restrictors

Expansion Sealing Plugs



order example
select bore size and orifice required d_2 (in inches)
e.g. SE0528.090-015-S, is a 9mm expansion restrictor
with 0.015" orifice

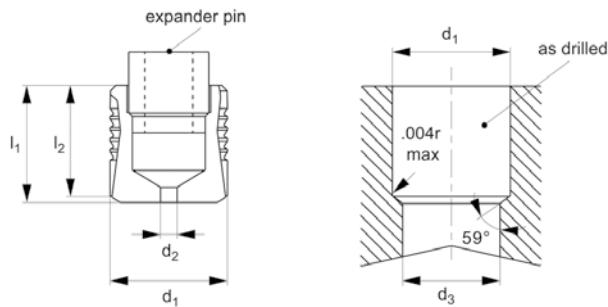

SE0528

EXPANSION SEALING PLUGS

Material

A2 Stainless steel.
Calibrated hole diameter (d_2).

Technical Notes

For restricting flow.
To order please specify orifice size d_2
required (-xxx) and add to order number.

Ordering example:

Select size required then add -xxx which
indicate reduced hole diameter (d_2), eg
SE0528.090-015-S indicated a 9mm bore
size with a 0.015" orifice.

Tips

Metric dimensions in mm.

Imperial dimensions in inches. (Length
Tolerance $\pm 0,006$)

Important Notes

Please refer to technical pages for
product installation details.

Order No.	d_1 +0	l_1 $\pm 0,010$	l_2 $\pm 0,010$	d_2 $\pm 0,001$	d_3 $\pm 0,010$	l_3 min.	d_4 max.
SE0528.040-XXX-S	4,00	4.0	3.7	0,012-0,015"	4.00	3.8	3.3
SE0528.050-XXX-S	5,00 -0,030	5.0	5.2	0,012-0,075"	5.00	5.3	4.3
SE0528.060-XXX-S	6,00 -0,030	6.0	6.2	0,012-0,100"	6.00	6.3	5.3
SE0528.070-XXX-S	7,00 -0,036	7.0	7.2	0,012-0,130"	7.00	7.3	6.2
SE0528.080-XXX-S	8,00 -0,036	8.0	8.2	0,012-0,150"	8.00	8.3	7.2
SE0528.090-XXX-S	9,00 -0,036	9.0	9.70	0,012-0,170"	9.00	9.8	8.2
SE0528.100-XXX-S	10,00 -0,036	10.0	10.70	0,012-0,195"	10.00	10.8	9.2
SE0528.120-XXX-S	12,00 -0,043	12.0	12.70	0,012-0,240"	12.00	12.8	11.0
SE0528.140-XXX-S	14,00 -0,043	14.0	14.40	0,012-0,280"	14.00	14.5	13.0
SE0528.156-XXX-S	0,1562 -0,0012"	0,161"	0,149"	0,012-0,050"	0,1562"	0,149"	0,130"
SE0528.187-XXX-S	0,1875 -0,0012"	0,220"	0,208"	0,012-0,070"	0,1875"	0,208"	0,160"
SE0528.218-XXX-S	0,2187 -0,0012"	0,220"	0,208"	0,012-0,085"	0,2187"	0,208"	0,190"
SE0528.250-XXX-S	0,2500 -0,0012"	0,259"	0,247"	0,012-0,105"	0,2500"	0,247"	0,220"
SE0528.281-XXX-S	0,2817 -0,0014"	0,299"	0,287"	0,012-0,130"	0,2812"	0,287"	0,250"
SE0528.312-XXX-S	0,3125 -0,0014"	0,338"	0,326"	0,012-0,150"	0,3125"	0,326"	0,281"
SE0528.343-XXX-S	0,3437 -0,0014"	0,397"	0,385"	0,012-0,160"	0,3437"	0,385"	0,312"
SE0528.375-XXX-S	0,3750 -0,0014"	0,397"	0,385"	0,012-0,180"	0,3750"	0,385"	0,343"
SE0528.406-XXX-S	0,4062 -0,0014"	0,437"	0,425"	0,012-0,195"	0,4062"	0,425"	0,375"
SE0528.437-XXX-S	0,4375 -0,0014"	0,515"	0,503"	0,012-0,220"	0,4375"	0,503"	0,406"
SE0528.468-XXX-S	0,4687 -0,0017"	0,515"	0,503"	0,012-0,240"	0,4687"	0,503"	0,437"
SE0528.562-XXX-S	0,5625 -0,0017"	0,594"	0,570"	0,012-0,290"	0,5625"	0,570"	0,510"